SIP-enabled h.264 Video Outdoor Intercom CyberData

The IP Endpoint Company

The CyberData SIP-enabled h.264 Video Outdoor Intercom is perfect for secure access settings requiring video and two-way communication.

With excellent color and low light capability, the CyberData SIP-enabled h.264 Video intercom can increase the security of any VoIP installation.

The Weather Shroud can be purchased separately for even greater weather protection.

Based on one of our most popular devices, the new Video Outdoor Intercom can be installed in nursing care facilities, schools and universities, daycare facilities, retail establishments, highway tolls, needing color video and clear two way audio.

Features

- PoE 802.3af enabled (Powered-over-Ethernet)
- SIP compliant
- Adjustable camera angle
- Full-duplex voice operation
- Supports SRST (Survivable Remote Site Telephony) in a Cisco environment
- Network web management
- Network adjustable speaker volume and microphone sensitivity
- Network downloadable firmware
- Doubles as a paging speaker
- Dry relay contact for auxiliary control (controls external power)
- Door closure and tamper alert signal
- Optional Weather Shroud for even greater weather protection
- IP65 rated enclosure
- Conformal coated PCBA
- Optional Security Torx screws with driver kit
- Downloadable alert, ringtones and callout messages

The following products are also available:







SIP Outdoor Intercom #011186



*Shown with the 011188 Weather Shroud (sold separately)

| CHOWN WITH THE CTTTE | o vvcatrici oriroda (sola separately) |
|------------------------|---|
| Specifications | |
| Ethernet I/F | 10/100 Mbps |
| Protocol | SIP RFC 3261 Compatible |
| Power Input | PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply |
| Speaker Output | 2 Watts Peak Power |
| On-Board Relay | 1A at 30 VDC |
| Operating Range | Temperature: -40°C to 55°C (-40° F to 131° F) Humidity: 5-95%, non-condensing |
| IP Rating | IP65 |
| Audio Payload Types | G711, A-law and μ-law |
| Video Codec | H.264 Baseline |
| Camera Resolution | 320 x 240 |
| SIP Video Payload | Baseline profile @ 320x240 |
| Dimensions | 5.118 inches [130 mm] Length 2.252 inches [57.21 mm] Width 5.118 inches [130 mm] Height |
| Video Lens Angle | 72 degrees |
| Weight Boxed Weight | 2.0 lbs. (0.90 kg) 3.0 lbs. (1.36 kg) |
| Warranty | 2 years limited |
| Part Number | 011410 011188 Weather Shroud (sold separately) |


Note: Electronics are conformal coated for environmental protection.





SIP-enabled h.264 Video Outdoor Intercom w/ Keypad #011414



SIP-enabled h.264 Video Outdoor Intercom

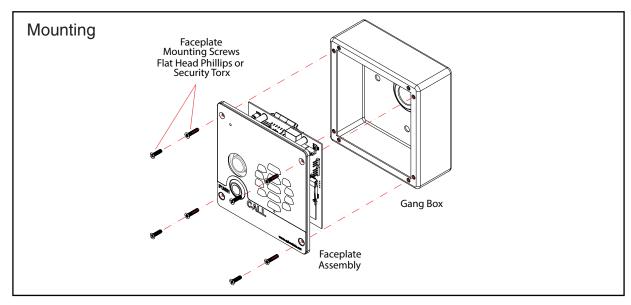

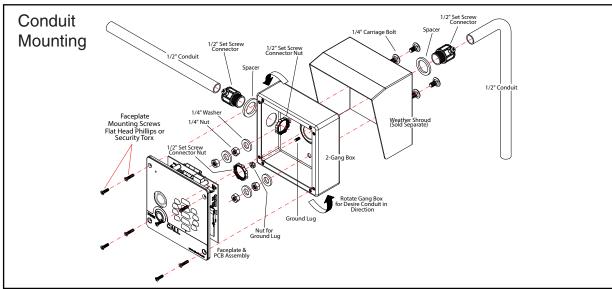

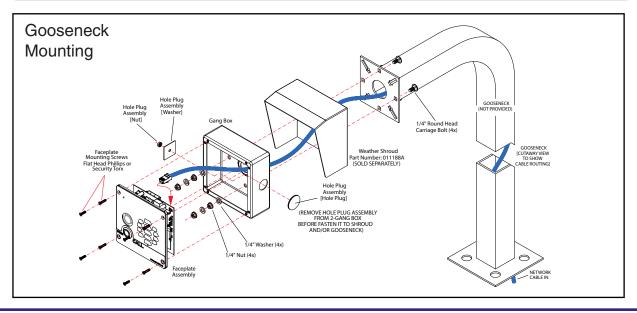

SIP-enabled h.264 Video Outdoor Intercom

