# VoIP V3 Indoor Emergency Intercom

Newly designed with a faster processor allowing for more capabilities, the CyberData SIP-enabled VoIP V3 Emergency Intercom is perfect for settings where either an emergency panic button or two-way priority communications are required.

One of many within our line of PoE powered VoIP signaling and communication endpoints, the CyberData SIP-enabled VoIP V3 Emergency Intercom has been installed in settings requiring panic buttons and mass notification such as nursing care facilities, schools and universities, daycare facilities and more, proving this device is truly a versatile, cost-efficient alternative to old analog intercoms.

## **Typical Applications**

- Panic button
- Emergency phone
- Mass notification

## **Modes of Operation**

- Two-way Emergency Intercom
- Direct call to preset extension (with stored message option)
- Multicast broadcast (push-to-talk)
- Emergency paging speaker

#### **Features**

- PoE 802.3af enabled (Powered-over-Ethernet)
- SIP compliant
- Adaptive full-duplex voice operation
- Network web management
- Network adjustable speaker volume and microphone sensitivity
- Network downloadable firmware
- Doubles as a paging speaker
- Dry relay contact for auxiliary control
- Peer-to-peer capable
- Door closure and tamper alert signal
- New Feature: Now supports SRST (Survivable Remote Site Telephony) in a Cisco environment.

SRST parameters are entered statically into the CyberData product's internal webpage.

| JUMP.                |  |
|----------------------|--|
|                      |  |
| EMERGENCY            |  |
| PRESS BUTTON TO CALL |  |

CyberData

The IP Endpoint Company


| Specifications           |   |
|--------------------------|---|
| Ethernet I/F             | 10/100 Mbps                                 |
| Protocol                 | SIP RFC 3261 Compatible                     |
| Power Input              | PoE 802.3af compliant or +5 volts at 1000mA |
| Operating Temperature    | -30 to 55 C (-22 to 131 F)                  |
| Payload Types            | G711, A-law and μ-law                       |
| Regulatory Compliance    | FCC Class A, UL 60950                       |
| Dimensions               | 5" x 5" x 2.5" (H x W x D)                  |
| Warranty                 | 2 years limited                             |
| Boxed Weight             | 1.2 lbs.                                    |
| Part Number              | 011209                                      |
| *This number replaces th | e 011035 number.                            |


The following Intercom models are also available:





# VoIP V3 Indoor Emergency Intercom

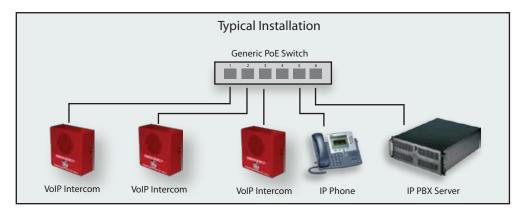

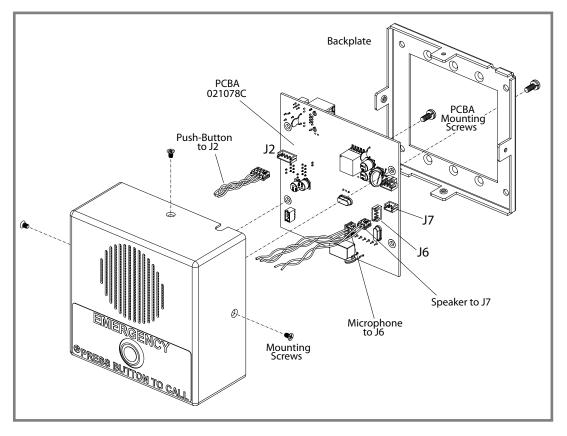



sales@alloy.com.au www.alloy.com.au

Proudly distributed in Australia and New Zealand by

### **Alloy Computer Products Pty Ltd**

# Melbourne

4/585 Blackburn Road, Notting Hill, VIC 3168 Tel: (03) 85629000 Fax: (03) 8562 9099

**Sydney** Suite 204, Milsons Landing, 6A Glen Street, Milsons Point, NSW, 2061 Tel: (02) 8080 9600 Fax: (03) 8562 9099